



GLR-7051DS

Monolithic Ribbing Machine

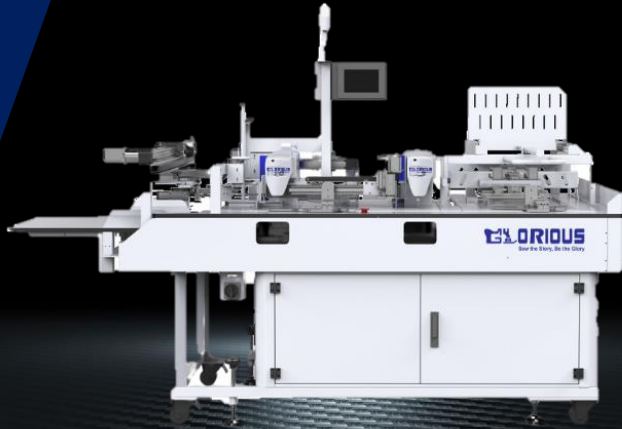


Range of application

Suitable for ribbing of the trousers and cuffs

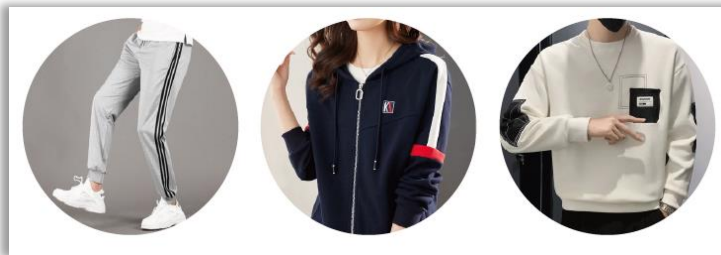


Specification Range

1. Patchwork and stitching




A = 120~ 300 mm
B*2 = 120~ 400 mm

2. Folded in half fixed



C = >20 mm

3. Fold Alignment



D = 60~ 150 mm
E = 50~ 190 mm

Application Process

Respond to demand, break through conventional design

The first point folding type




After the second fixation, it can be folded automatically

Remote data collection system (optional)



Failure rate data
Capacity data
Usage data

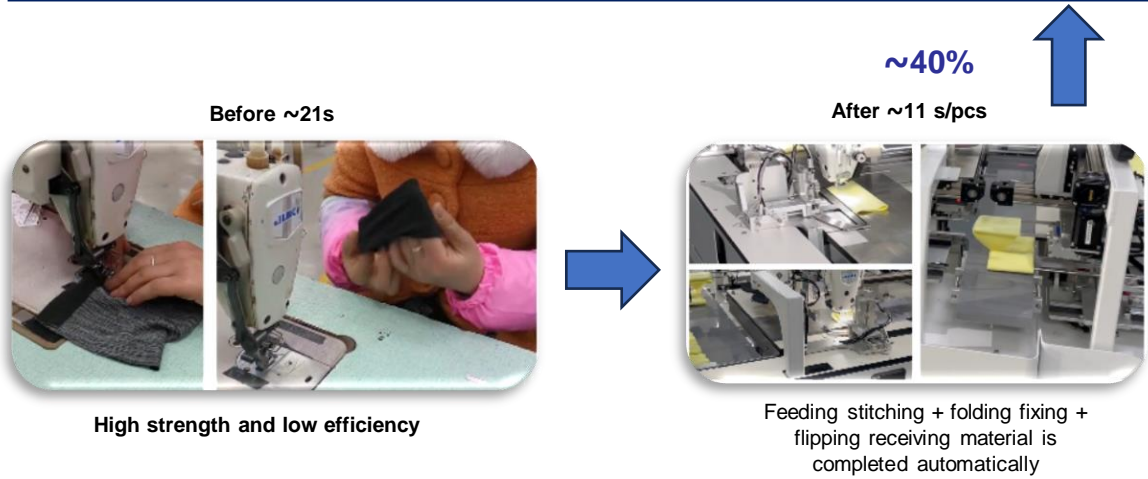

Technical Parameters

Model	GLR-7051DS
Voltage	220V 50~60 Hz single
Ari Pressure	0.5 – 0.6 MPa
Power	3 KW
Dimensions	2500 × 1500 × 1700 MM
Packing Size	2360 × 1665 × 1800 MM
Net Weight	500 KG
Gross Weight	680 KG