


## GLR-1RIB

### Automatic Rib Cuff Installing Machine



#### Range of application

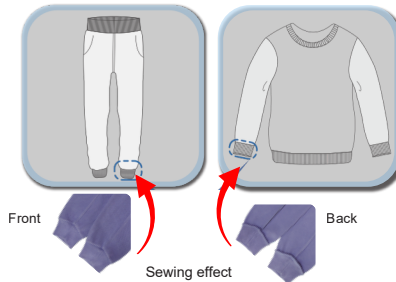

#### Product features

- No need for skilled workers, reducing operating costs.
- The left and right cuffs can be sewn circularly.
- "Patent" Pneumatic deviation correction function.
- Break stitch automatic stop alarm.
- Automatic recognition of seam position, overlap line accurately, beautiful effect.

#### Specification parameter

Specification	GLR-1RIB
Adaptive model	Customized – PEGASUS: EXT5114
Nominal voltage / Frequency	200–240 V / 50 Hz
Rated power	0.8 kW
Working gas pressure	0.5–0.6 MPa
Sewing speed	2500–4500 RPM
Rib width (flat)	100–160 mm
Rib width (folded)	40–100 mm
Rib size vs cuff width	< 50 mm
Trim size	< 5 mm
Applicable fabric range	1×1, 2×2, 2x1 rib; fine cotton; chemical fiber ribbing
CT time / piece	<15 s / piece
Equipment / package dimensions	Equipment: L1250 × W1240 × H1300 mm; Package: L1550 × W1540 × H1300 mm