

型号	Model	LS-4241A
电压	Voltage	220V 50~60 Hz
气压	Air pressure	0.5~0.6 MPa
功率	Power	4.8 KW
外形尺寸	Dimensions	1300*630*980 MM
装箱尺寸	Packing size	1375*710*1258 MM
净重	Net weight	105 KG
毛重	Gross weight	160 KG


*以上型号仅供参考，详细情况请咨询。
The above models are for reference only, please inquire for details.

*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
For improvement, product specifications are subject to change without notice. For safety reasons, read the manual carefully before use.

LS-4241A

拉链预扩机

Zipper pre-expansion machine

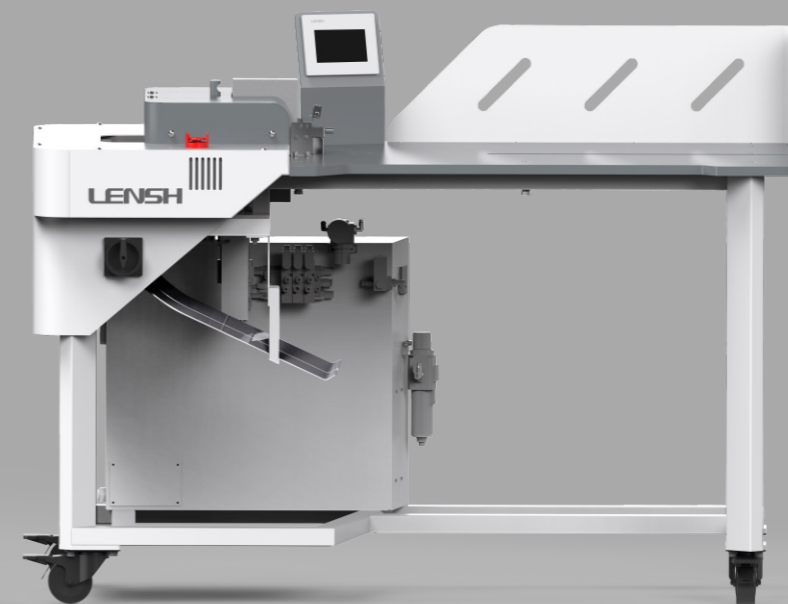

浙江凌志智能科技有限公司
ZHEJIANG LENSH INTELLIGENT TECHNOLOGY CO.,LTD.

地址: 宁波市海曙区光文路500号 电话(TEL): 0574-8742 3969 0574-8388 5719
Address: No 500 RD Guangwen District Haishu Ningbo Zhejiang, China E-mail: wuhanqiao66@163.com web: www.lensh.net



LENSH®

应用范围 | Application

适用各类服装拉链预扩伸

Suitable for all kinds of clothing zipper pre-extension



应用工艺 | Application process

应对不同工艺，提供配套选购设备及组件

provide matching equipment and components for different processes

金属扩拉轮 (标配)

Metal pulley (standard)



适用树脂、金属等拉链，如有特殊需求可定制

Suitable for nylon, metal and other zippers, if there are special specifications can be customized

远程数据采集系统 (选配)

Remote data collection system (optional)




故障率数据 Failure rate data

产能数据 Capacity data

使用率数据 Usage data

规格范围 | Specification range

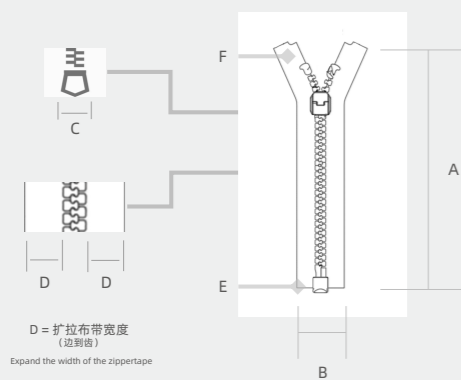

A mm	B mm	C mm	D	扩伸比 Expansion ratio
> 150	20~50	5~37	30~95%	1.00~1.05

Zipper pre-expansion
拉链预扩




效率分析 | Efficiency analysis

110%




Before 约 17 s / pcs

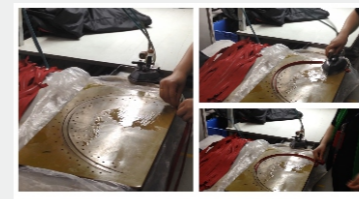

扩拉效果不佳 效率低

Poor expansion and pulling effect low efficiency

After 约 6~9 s / pcs

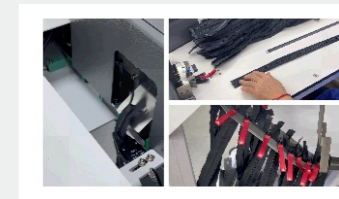

提升效率品质 扩拉系数可变

Improve efficiency and quality The expansion and pulling ratio is variable