

型号	Model	LS-5011C
电压	Voltage	220V 50~60Hz
气压	Air pressure	0.5-0.6 Mpa
功率	Power	3.5 KW
外形尺寸	Dimensions	1720*980*1650 MM
装箱尺寸	Packing size	1830*1180*1860 MM
净重	Net weight	500 KG
毛重	Gross weight	680 KG
加热元件功率	Heating element power	2.2 KW
加热元件额定温度设定	Temperature setting of heating element	120±10°C


*以上型号仅供参考，详细情况请咨询。
The above models are for reference only, please inquire for details.

*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
For improvement, product specifications are subject to change without notice. For safety reasons, read the manual carefully before use.

LS-5011C

绳头内塞打结机

Rope head inner plug knotting machine

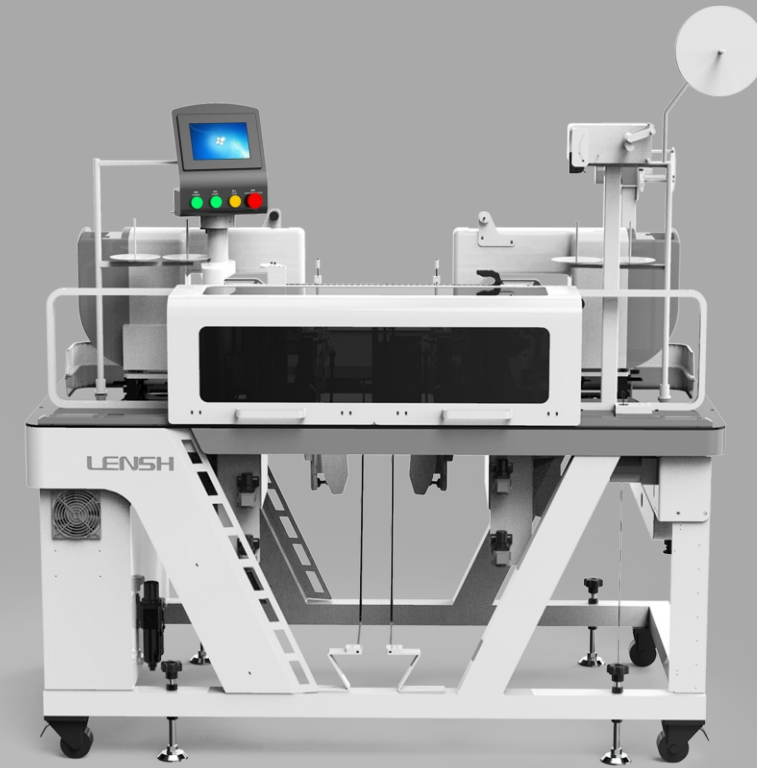

浙江凌志智能科技有限公司
ZHEJIANG LENSH INTELLIGENT TECHNOLOGY CO.,LTD.

地址: 宁波市海曙区光文路500号 电话(TEL): 0574-8742 3969 0574-8388 5719
Address: No 500 RD Guangwen District Haishu Ningbo Zhejiang, China E-mail: wuhanqiao66@163.com web: www.lensh.net



LENSH®

应用范围 | Application

适用裤腰绳、帽绳封头打结

Pants waist cords, cap cord ends bartack



应用工艺 | Application process

应对不同工艺，提供配套选购设备及组件

Provide marching equipment and components for different processes

标配内置烫平机功能

Built-in ironing machine function as standard





节省空间 增加稳定度 降低成本
Space savings Increase stability and reduce costs

远程数据采集系统 (选配)


Remote data collection system (optional)

LSSX




故障率数据 Failure rate data
产能数据 Capacity data
使用率数据 Usage data

规格范围 | Specification range

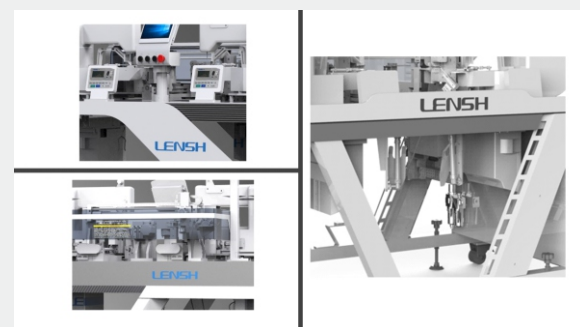


Rope length
绳长度 > 50cm



8-20mm

效率分析 | Efficiency analysis

400% ↑

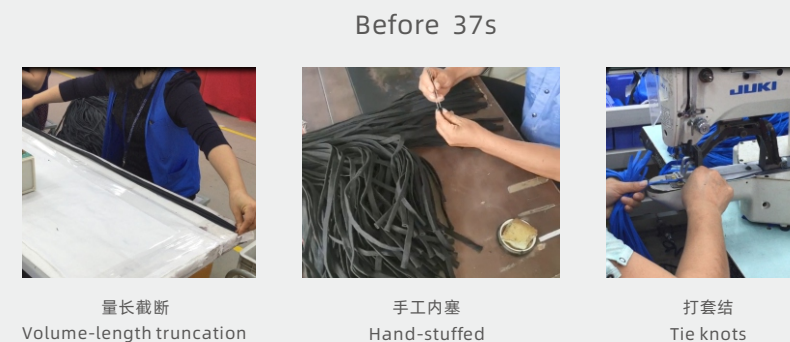

Before 37s

After 7~8s

量长截断
Volume-length truncation

手工内塞
Hand-stuffed

打套结
Tie knots

无人化作业
unmanned operation