

型号	Model	LS-7051DS
电压	Voltage	220V 50~60Hz Single 单相
功率	Power	3 KW
气压	Air Pressure	0.5-0.6 MPa
外形尺寸	Dimensions	2500*1500*1700 MM
装箱尺寸	Packing size	2360*1665*1800 MM
净重	Net weight	500 KG
毛重	Gross weight	680 KG

*以上型号仅供参考，详细情况请咨询。
The above models are for reference only, please inquire for details.

*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
For improvement, product specifications are subject to change without notice. For safety reasons, read the manual carefully before use.

LS-7051DS

单片罗纹机

Monolithic ribbing machine



浙江凌志智能科技有限公司
ZHEJIANG LENSH INTELLIGENT TECHNOLOGY CO.,LTD.

地址：宁波市海曙区光文路500号 电话(TEL)：0574-8742 3969 0574-8388 5719
Address: No 500 RD Guangwen District Haishu Ningbo Zhejiang, China E-mail: wuhanqiao66@163.com web: www.lensh.net



LENSH®

应用范围 | Application

适用于裤口袖口的罗纹加工

Suitable for ribbing of the trousers and cuffs



应用工艺 | Application process

应对需求, 突破常规设计

Response to demand, break through conventional design

首创对点式折翻

The first point folding type



二道固定后 可以自动折翻

After the second fixation, it can be folded automatically

远程数据采集系统 (选配)


Remote data collection system (optional)



- 故障率数据 Failure rate data
- 产能数据 Capacity data
- 使用率数据 Usage data


规格范围 | Specification range

1 拼合缝制 Patchwork and stitching




布料规格 Fabric specifications
A = 120 ~ 300 mm
B*2 = 120 ~ 400 mm

2 对折固定 Folded in half fixed



固定长度 Fixed length
C = > 20 mm

3 折翻对齐 Fold alignment




成品规格 Finished product specifications
D = 60 ~ 150 mm
E = 50 ~ 190 mm

效率分析 | Efficiency analysis

~ 40 %




Before ~ 21s

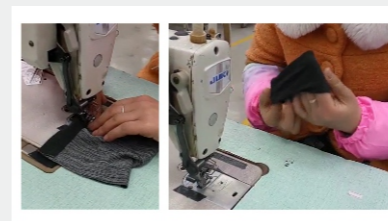

缝合+对折固定+翻转

Stitching + folding in half to fix + flip

After ~ 11s

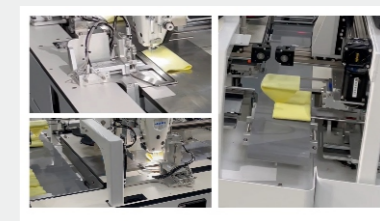

上料缝合+对折固定+翻转收料 自动化完成

Feeding stitching + folding fixing + flipping receiving material is completed automatically