



**PEGASUS®**

# M900 Series **NEW** Built-in Direct Drive Motor

**ORIGINAL  
MOTOR**

**D222 series**

**ECONOMY Type**



**D232 series**

**STANDARD Type**



**Powerful !!**

**Electricity Save!!**

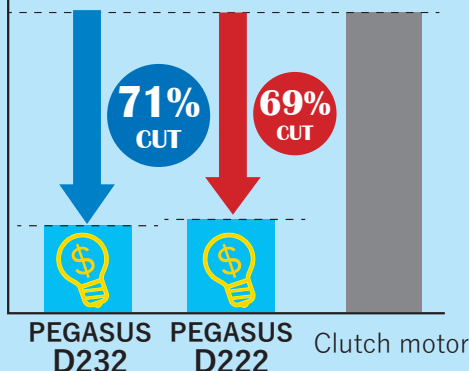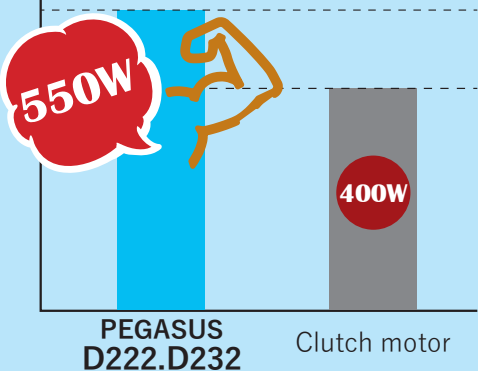

※With a machine speed of 5,000 sti/min, intermittent drive (2 sec drive and 2 sec stop)

## **Point** Built-in Direct Drive Motor

### ● PEGASUS Original Motor

Designed and manufactured by PEGASUS.



### ● CE Marking

Compliance to standards in EU.



### ● User Friendly

- Quick and Easy Installation.
- Motor Structure **Patented Design**
  - Sealed Motor Coil
    - Dust Protection and Heat Prevention.
  - No Coupling
    - Direct Transmission and Easy Setup.
- High power, 550W.

### ● Specification

	D222	D232
MAX.SPEED (sti/min)	6,500*	7,000*
DEVICE	PL,LC,KS,KH	PL,LC,TK,KS,KH,AS

※See subclass chart



## M922/D222·D232 : Double chainstitch machine

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. speed		Needles	Accessories	1) Optional device	Remarks
											D222 (sti/min)	D232 (sti/min)				
①	Bindina tape	Light to medium	M922-02x250-24	2	4	5	-	3.7	0.7-1.7	3.5	6,000	6,000	DCx27 #14(90)	Binder 24mm(6)	TK/PL/LC	

1) TK device(pneumatic type) is only applicable to D232 series.

## M932/D222·D232 : Safety stitch machine


Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. speed		Needles	Accessories	1) Optional device	Remarks
											D222 (sti/min)	D232 (sti/min)				
②③	Plain seaming	Medium	M932-38-3x4	2	5	3	4	3.7	0.7-1.7	5.5	6,500	7,000	DCx27 #14(90)		TK/KH/PL/LC	
			M932-70-5x5			5	5									
		Extra heavy	M932-86-5x6			5	6	5.3	0.6-1.3		5,500	5,500				
④	Shirring	Light to medium	M932-48-3x4	2	5	3	4	3.3	1-2.8	5.5			DCx27 #14(90)	Shirring device	TK/KH/LC	
⑤	Shirring while piping	Light to medium	M932-48P2-3x4	2	5	3	4	3.3	1-2.8	5	5,000	5,000	DCx27 #14(90)	Shirring device Binder 25mm	TK/LC	
⑥	3-needle versatile	Medium	M932-355-3x2x4	3	6	3+2	4	3.7	0.7-1.7	5.5	6,000	6,000	DCx27 #11(75)		TK/KH/PL/LC	
⑦	Attaching U-shaped tape	Medium	M932-551-5x2.5x3.5	3	6	5+2.5	3.5	3.7	0.7-1.7	5.5			DCx27 #11(75)		TK/PL/LC	

1) TK device(pneumatic type) is only applicable to D232 series.

## M952/D222·D232 : Overedger

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. speed		Needles	Accessories	1) Optional device	Remarks
											D222 (sti/min)	D232 (sti/min)				
⑧	Blindstitch hemming	Light to medium	M952-01-4	1	3	-	4	3.7	0.7-1.7	5.5	6,500	7,000	DCx27 #9(65)	Blindstitch hemming welt guide(40mm)	KS/PL/LC	
⑨⑩	Plain seaming	Light to medium	M952-17-4	1	3	-	4	3.7	0.7-1.7	5.5				6,000	6,000	DCx27 #9(65)
			M952-13-2x4	2	4	2	5									
			M952-13H-2x4				4									
			M952-13H-2x5				5									
			M952-13H-2x7	7	6,500	7,000										
			M952-52-2x4	4												
			M952-52-2x5	5												
			M952-52H-2x4	4	6,000	6,000										
			M952-52H-2x5	5												
			⑪	Turn down hemming	Light	M952-16S2-1.5	1				3	-	1.5	3.7	0.7-1.7	
⑫⑬	Backlatching	Light to medium	M952-180-4	1	3	-	4	3.7	0.7-1.7	5.5	6,500	7,000	DCx27 #9(65)	Manual backlatching device(BT9B)	KS(LC)	
			M952-181-2x4	2	4	2	4.8			Manual backlatching device(BT9C)						
⑭	Butt-end sewing	Light to medium	M952-90-6	1	2	-	6	6.2	0.7-1.7	3	5,000	5,000	DCx27 #14(90)	Wide knives	PL/LC	

1) TK device(pneumatic type) is only applicable to D232 series.

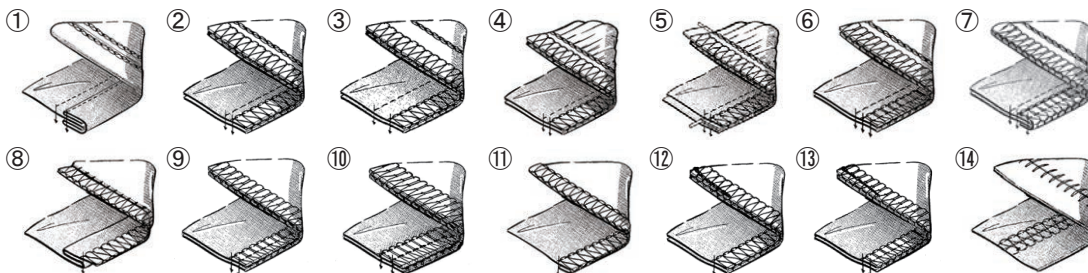

PEGASUS SEWING MACHINE MFG. CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 / FAX : +81-6-6454-8785

<http://www.pegasus.co.jp>

※ The specifications and/or appearances described in this catalog are subject to change without previous notice.

©2019 PEGASUS SEWING MACHINE MFG. CO., LTD.

Catalog No. 103125 Produced September 2019.

