

cuTex[®] (큐텍스)

자동 라벨 절단기(냉칼)

모델명:

TBC-50S



테이프 형태의 라벨을 원하는 수량과 길이로 자동 절단하여 줍니다.

최대 110mm폭의 테이프를 최소길이 1mm, 최대길이 50m까지 절단 가능


■ 특징

- 고속절단 : 분당 120~140장을 절단합니다. (절단길이: 50mm 기준)
- 정확성 : 센서가 부착되어 원하는 지점을 감지, 정확히 절단하여 주며, 정전기 방지장브러쉬가 있어 가볍고 얇은 소재도 칼날에 들러붙지 않습니다.
- 절단방식 : 가위와 같은 방식으로 비껴 절단하므로 절단상태가 깨끗하며, 고강도 칼날을 사용하여 수명이 오래 갑니다.
- 자동작업 : 길이와 수량만 입력하면 작업이 자동으로 수행됩니다.
- 자동스톱 : 절단중 소재가 떨어지면 작동이 자동으로 멈추게 됩니다.
- 기억장치 : 전원을 껐다 켜도 입력된 길이, 수량, 속도는 지워지지 않습니다.

간편한 기능, 컴팩트한 디자인 **cuTex®**

■ 모델명

TBC-50S

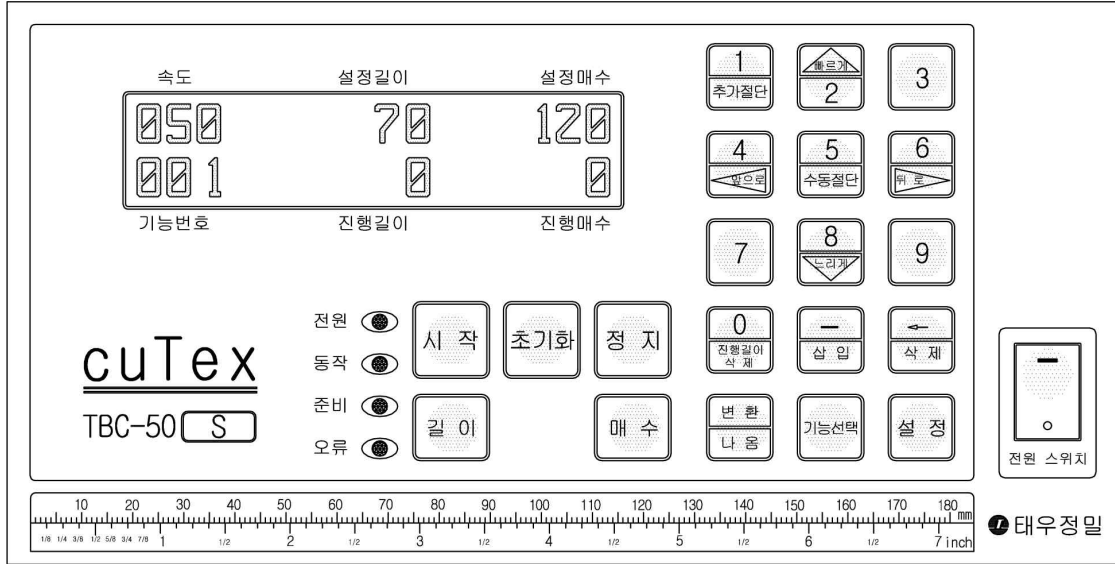

⊗ 작동 방법

- 기능선택: **기능선택** 버튼 + **1** 버튼 + **설정** 버튼
- **길이** 버튼 + 원하는 길이 수치 + **설정** 버튼
- **매수** 버튼 + 원하는 매수 수치 + **설정** 버튼
- 센서조정 + **시작** 버튼 → 작업개시

⊗ 키보드 기능

- **5** 수동절단 또는 칼날에 끼인 소재를 빼내거나, 칼날교환시 칼날을 맞출 때
- **4** 앞으로 **6** 뒤로 재료를 장착하거나 앞뒤로 수동 이송시킬 때
- **빠르게** **2** **느리게** **8** 작업중에 절단속도를 가속하거나 감속할 때
- **진행길이 삭제** 입력된 길이절단을 위해 진행길이를 0으로 만들 때
- **초기화** 진행매수와 진행길이를 삭제하고 다시 작업할 때
- **기능선택** 라벨절단시엔 "1", 일반소재 절단시엔 "0"
- **1** 1개를 추가로 절단할 때
- 기타 다양한 프로그램 기능 보유

⊗ 절단 소재

- 인쇄 라벨
- 벨트 고리
- 벨크로 테이프
- 끈, 안감
- 수축 튜브
- 플라스틱 지퍼(소형)
- 전선줄, 버티칼

⊗ 제품 사양

- 절단칼 : 냉칼
- 최대 절단폭 : 110mm
- 절단길이 범위 : 1mm~300meter
- 절단속도 : 120~140장/분
- 공급전원 : AC110/220V, 50/60Hz
- 기계규격/순중량 : 850×320×380/19.5kg
- 포장규격/총중량 : 535×430×370/22.7kg



(주)태우정밀
TAEWOO CO., LTD.
본사, 공장 : 경기도 남양주시 와부읍 덕소로 234
시범공단 B-501 (472-908)
전화 : (031) 521-6904 ~7
팩스 : (031) 521-6908
홈페이지 : <http://www.cutex.co.kr>
메 일 : taewoo@cutex.co.kr

■ 취급 대리점:



cuTex®

PRINTED LABEL CUTTER WITH SENSOR (COLD)

MODEL:

TBC-50S



WITH BUTTON-SWITCHING, PRINTED LABEL WILL BE CUT AUTOMATICALLY AND NEATLY.

Strip-labels with max. 110mm wide can be cut & stacked at a range of 1mm~50m long.

■ SPECIAL FEATURES


- High speed : It can cut 120~140 cuts per minute.(50mm long)
- Accuracy : A sensor makes cut-length accurate by automatic sensing at set-position.
The anti-static device(option) is useful for cutting labels which generate a lot of static electricity, preventing cut labels from clinging to knife blade.
- Cutting type : Cutting is neat due to using a cold cutter like scissors and blades are durable because they are made of high-speed steel (HSS).
- Automatic operation : It works automatically only by setting length and quantity.
- Automatic stopper : It stops automatically if materials run out during operation.
- Memory : Set-length, set-q'ty & set-speed are not erased even if power off & on.

EASY TO USE & COMPACT DESIGN

cuTex®

■MODEL:

TBC-50S

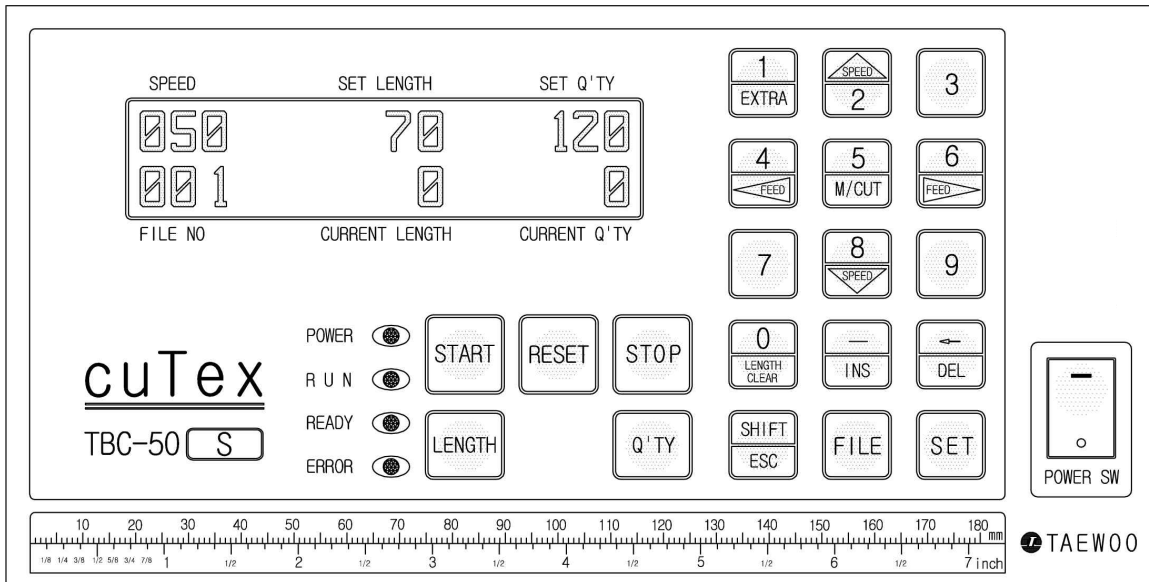

☒ OPERATION

- [FILE] button + [1] button + [SET] button
- [LENGTH] button + set-length + [SET] button
- [COUNTER] button + set-quantity + [SET] button
- Adjusting sensor + [START] button → operation

☒ KEY BOARD FUNCTION


- [5] M/CUT Manual cutting, or to take out jammed material in knife blades, or to fit blades in exchange of knife.
- [4] FEED [6] FEED to move the roller forwards or backwards.
- [SPEED] [2] [8] SPEED to be the cutting speed up or down manually.
- [LENGTH CLEAR] to make the current length zero for operation.
- [RESET] to delete the current length and the current quantity.
- [FILE] "1" for label cutting, "0" for non-label cutting.
- [1] EXTRA to cut additional one.
- Other various programming functions

☒ AVAILABLE MATERIALS

- Printed label
- Belt loop
- String, Wick
- VELCTRO® tape
- Shrink tube
- Interlining

☒ SPECIFICATIONS

- CUTTING KNIFE : Cold
- CUTTING WIDTH : 110mm max.
- CUTTING LENGTH : 1mm~300M
- CUTTING SPEED : 120~140cuts/min.
- POWER SUPPLY : AC110/220V, 50/60Hz



(주)태우정밀
TAEWOO CO., LTD.

ADDRESS: B-501, 234, DEOKSO-RO, WABU-EUP
NAMYANGJU-SI, GYEONGGI-DO, KOREA
(Postcode : 472-908)
TEL. : +82 31 521-6904~7
FAX : +82 31 521-6908
E-mail : taewoo@cutex.co.kr
Web : http://cutex.co.kr

■ AGENT: